





**Bezvôľové vlnocové spojky so zverným nábojom**

**Materiál: prírubca - hliník, eloxovaný hliník**

**vlnovec - nerezová oceľ**

**Využitie vhodné na tlmenie vibrácií**

imbusová skrutka  
DIN912

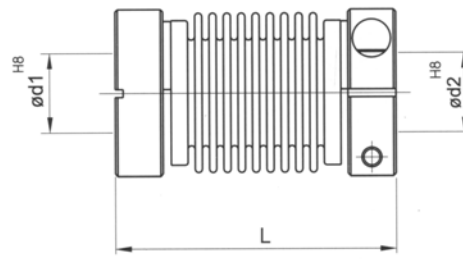

Typ	Vŕtanie d1/d2		Priemer D	Dĺžka L	Nastavovacia skrutka
	min.	max.			
BKXX 1622 03/03	3	3	16	22	M2x8
BKXX 1622 03/05	3	5	16	22	M2x8
BKXX 1622 03/06	3	6	16	22	M2x8
BKXX 1622 04/04	4	4	16	22	M2x8
BKXX 1622 04/05	4	5	16	22	M2x8
BKXX 1622 04/06	4	6	16	22	M2x8
BKXX 1622 05/05	5	5	16	22	M2x8
BKXX 1622 06/06	6	6	16	22	M2x8
BKXX 1627 03/03	3	3	16	27	M2x8
BKXX 1627 03/05	3	5	16	27	M2x8
BKXX 1627 03/06	3	6	16	27	M2x8
BKXX 1627 04/04	4	4	16	27	M2x8
BKXX 1627 04/05	4	5	16	27	M2x8
BKXX 1627 04/06	4	6	16	27	M2x8
BKXX 1627 05/05	5	5	16	27	M2x8
BKXX 1627 06/06	6	6	16	27	M2x8

Typ	Vŕtanie d1/d2		Priemer D	Dĺžka L	Nastavovacia skrutka
	min.	max.			
BKXX 2129 06/06	6	6	21	29	M2,5x8
BKXX 2129 06/10	6	10	21	29	M2,5x8
BKXX 2129 08/08	8	8	21	29	M2,5x8
BKXX 2129 10/10	10	10	21	29	M2,5x8
BKXX 2135 06/06	6	6	21	35	M2,5x8
BKXX 2135 06/10	6	10	21	35	M2,5x8
BKXX 2135 08/08	8	8	21	35	M2,5x8
BKXX 2135 10/10	10	10	21	35	M2,5x8
BKXX 2435 06/12	6	12	24	35	M2,5x8
BKXX 2435 10/12	10	12	24	35	M2,5x8
BKXX 2435 12/12	12	12	24	35	M2,5x8

Typ	BKXX1622	BKXX1627	BKXX2129	BKXX2135	BKXX2435
Max. otáčky [min-1]	10 000	10 000	10 000	10 000	10 000
Max. krútiaci moment [Ncm]	40	40	80	80	80
Max. vyosenie osí					
radiálne [mm]	±0,2	±0,3	±0,25	±0,3	±0,3
axiálne [mm]	±0,4	±0,5	±0,4	±0,5	±0,5
úhol [stupeň]	±3	±4	±4	±4	±4
Tuhosť pružín v krute [Nm/rad]	90	70	150	140	140
Radiálna tuhosť pružín [N/[mm]]	40	15	25	10	10
Moment zotrvačnosti [gcm <sup>2</sup> ]	2,1	2,6	9	9,5	10,8
Max. moment skrutky [Ncm]	50	50	100	100	100
Hmotnosť [g]	6	7	15	16	18