

art.LB **MOBILE SUPPORTS mod.10/30 (in bronze)** of minimal size, with accessories.

art.LN **MOBILE SUPPORTS mod.10/30 (in nylon)** of minimal size, with accessories.

art.LS **MOBILE SUPPORTS mod.10/30 (in steel)** of minimal size, with accessories.

- Movement support/nut -

Assembled supports LB/LN/LS

LB/LN/LS supports - exploded diagram


Assembled LB support



Assembled LN support




Assembled LS support

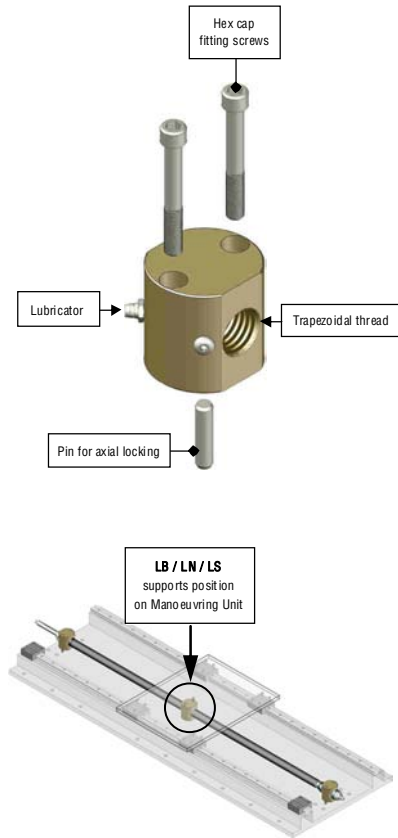

> The LB supports/nuts, when used with a stainless steel trapezoidal screw and the LN supports/nuts when used with an anodized aluminium alloy or stainless steel screw, can be supplied with stainless components upon request.

> Complete diagrams for fitting to the machine are shown on page 65/R

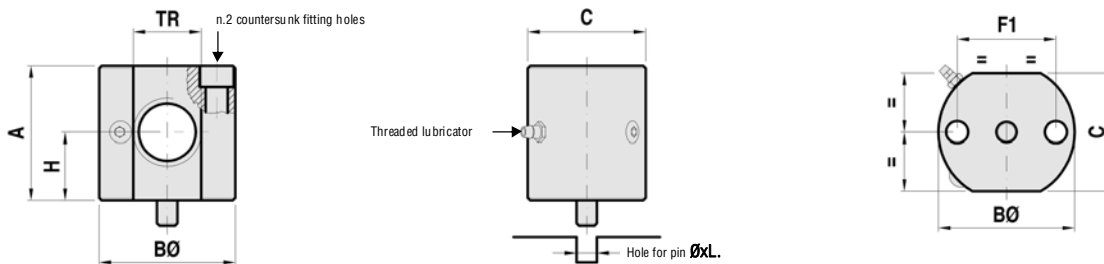

> Approximate weight with accessories and fitting bolts

| TR | CODE Dx LB - bronze | ART. Dx LB - bronze | CODE Dx LN - nylon | ART. Dx LN - nylon | CODE Dx LS - steel | ART. Dx LS - steel | A | BØ | C | H | F1 | Hex. cap fitting screws | ØxL. hole for pin | WEIGHT Kg (bronze) | WEIGHT Kg (nylon) | WEIGHT Kg (steel) |
|---------|------------------------|------------------------|-----------------------|-----------------------|-----------------------|-----------------------|----|----|----|------|----|----------------------------|----------------------|--------------------------|-------------------------|-------------------------|
| TR 10x2 | 304SM0102R | LB TR 10x2 R | 304SM1102R | LN TR 10x2 R | 304SM2102R | LS TR 10x2 R | 29 | 30 | 25 | 15 | 18 | M6x35 | Ø6x10 | 0,150 | 0,040 | 0,130 |
| TR 12x3 | 304SM0123R | LB TR 12x3 R | 304SM1123R | LN TR 12x3 R | 304SM2123R | LS TR 12x3 R | 34 | 35 | 30 | 17,5 | 22 | M6x40 | Ø6x10 | 0,240 | 0,060 | 0,210 |
| TR 16x4 | 304SM0164R | LB TR 16x4 R | 304SM1164R | LN TR 16x4 R | 304SM2164R | LS TR 16x4 R | 39 | 40 | 34 | 20 | 25 | M8x45 | Ø8x10 | 0,350 | 0,090 | 0,320 |
| TR 20x4 | 304SM0204R | LB TR 20x4 R | 304SM1204R | LN TR 20x4 R | 304SM2204R | LS TR 20x4 R | 49 | 50 | 44 | 25 | 33 | M8x55 | Ø8x10 | 0,700 | 0,170 | 0,620 |
| TR 25x5 | 304SM0255R | LB TR 25x5 R | 304SM1255R | LN TR 25x5 R | 304SM2255R | LS TR 25x5 R | 54 | 55 | 46 | 27,5 | 37 | M10x65 | Ø10x10 | 0,930 | 0,220 | 0,820 |
| TR 30x6 | 304SM0306R | LB TR 30x6 R | 304SM1306R | LN TR 30x6 R | 304SM2306R | LS TR 30x6 R | 59 | 60 | 50 | 30 | 42 | M10x70 | Ø10x10 | 1,200 | 0,290 | 1,070 |

For ordering supports with TR LEFT thread (Sx): When ordering supports LB - LN - LS with left thread (instead of right), substitute "R" with "L" of the code and article listed above.
EXAMPLE: to order del support LB TR 20x4 left the code becomes "304SM0204L" that corresponds relatively to art. "LB TR 20x4 L".

> The above supports shown in the assembled Compact Simple Groups (see previous pages) for which it is possible to calculate the total weight by adding them to the weight of the TR screw using the table on page 65/D.
 > To comply with safety regulations, the use of the supplied pin and the fitting nuts and bolts is obligatory, as is ensuring tapping of the thread on materials of adequate thickness and resistance, see page 65/D.