


GEAR COUPLINGS WITH ELECTRICAL INSULATION

FGC.EI SERIES

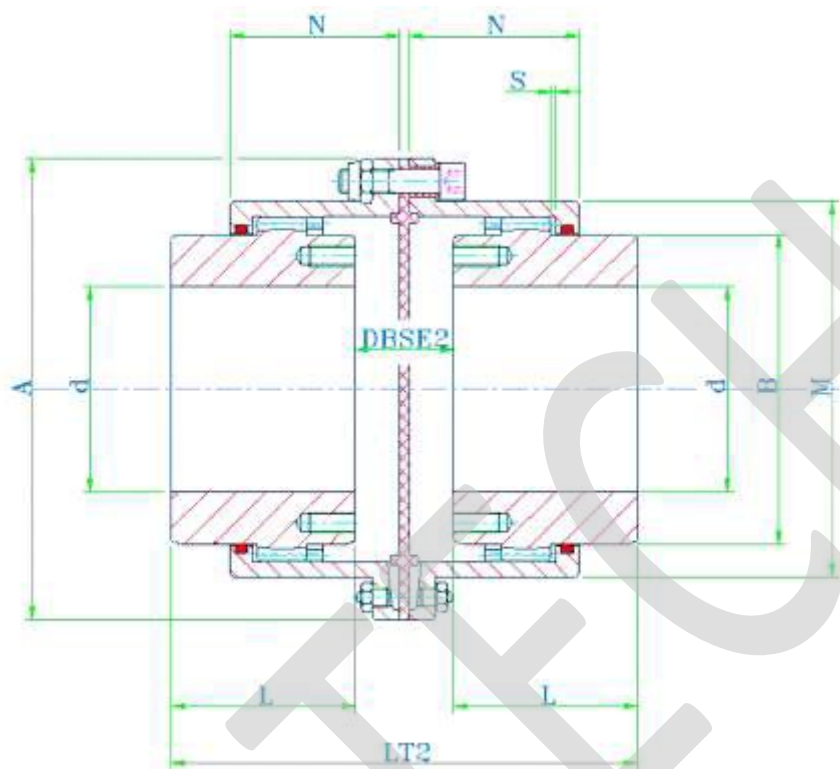

SIZE	Tk [kNm]	Tmax [kNm]	MAX SPEED [rpm]	MAX BORE d [mm]	A [mm]	B [mm]	L [mm]	LT [mm]	M [mm]	N [mm]	DBSE2 [mm]
FGC.96.EI	1.9	4.2	6000	52	111	68	43	93	82.5	39	10
FGC.122.EI	2.9	6.8	4550	62	142	86	50	113	104.6	45.5	16
FGC.148.EI	5.7	14.0	4000	78	168	105	62	149	130.5	59	28
FGC.178.EI	9.0	21.5	3900	98	200	132	76	190	158.4	68	42
FGC.203.EI	14.5	35.0	3700	112	225	151	90	223	183.4	82.5	47
FGC.236.EI	22.8	54.7	3550	132	265	179	105	258	211.5	93	52
FGC.270.EI	34.8	83.5	3000	156	300	209	120	298	245.5	106	63
FGC.300.EI	45.8	110	2750	174	330	234	135	336	275	118	71
FGC.335.EI	70.8	170	2420	190	370	255	150	392	307	138	97
FGC.368.EI	85.4	205	2270	210	406	280	175	448	335	154	103
FGC.400.EI	150	360	1950	233	439	306	190	488	367	166	113
FGC.460.EI	200	480	1730	280	505	356	220	574	423	193	139